


Rep Name: _____

Email: _____


Phone Number: _____

Date: _____ / _____ / _____

SL1500-SL2000

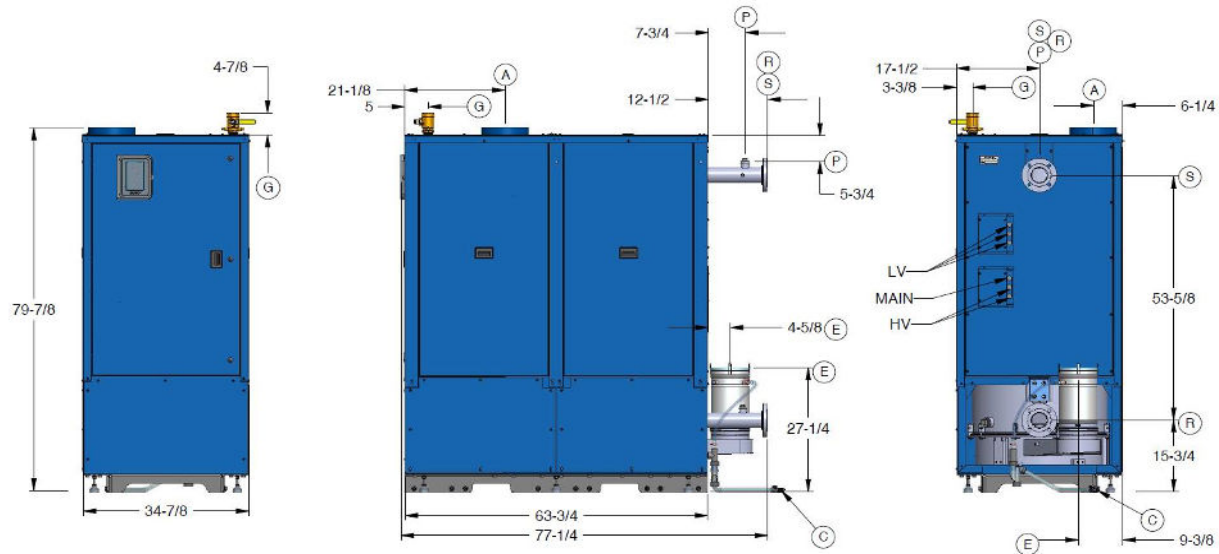

SL2500-SL3000

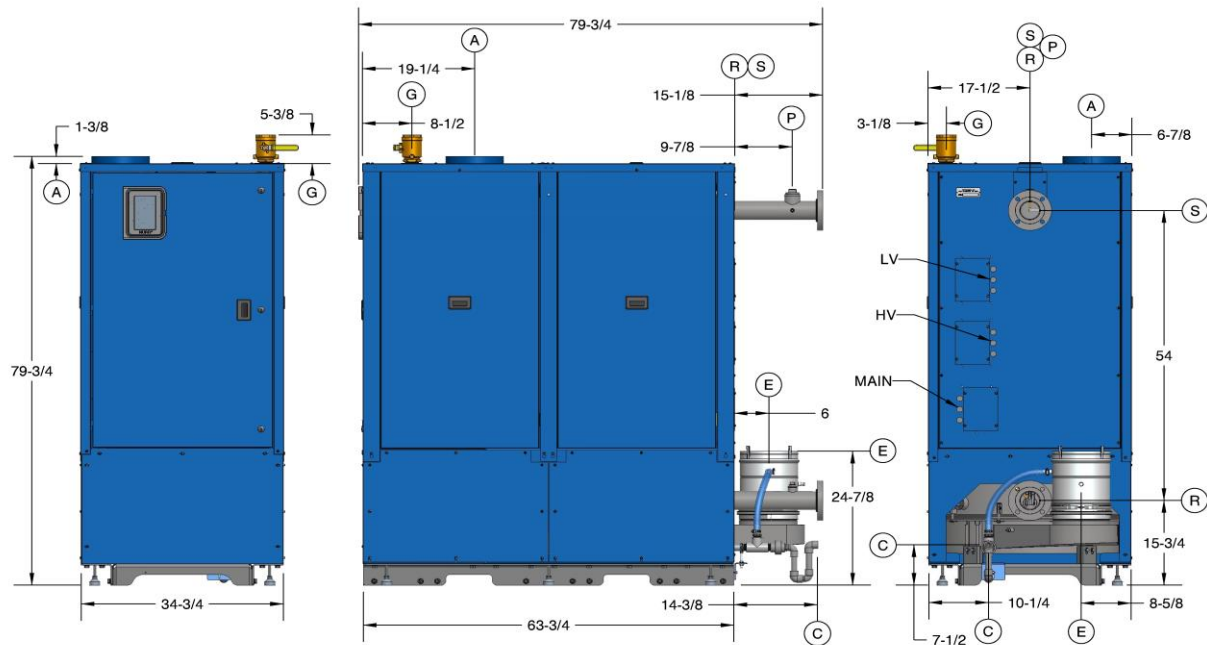

Primary dimensions are in inches. The secondary dimensions, [in brackets], are in millimeters.

This boiler requires Category IV venting (condensing-positive pressure) or Category II venting[†] (condensing -negative pressure as defined in ANSI Z223.1/NFPA 54/CSA-B.149 latest edition).

[†]Category II venting must include the optional combustion air damper



BOILER CONECTIONS

A	Combustion Air Inlet	10" dia. stub
C	Condensate Drain	3/4" hose
E	Exhaust Vent	8" (1500 & 2000) 10" (2500 & 3000)
G	Natural Gas	1-1/2" NPT-F (1500 & 2000) 2" NPT-F (2500 & 3000)
J	Wiring Junction Boxes	inside cabinet
P	Pressure Relief Valve	see list for options
R ¹	Boiler Return	3" pipe, flanged
S ¹	Boiler Supply	3" pipe, flanged

BOILER CONTROLS

ASME CSD-1 is standard
Complies with: GE GAP (IRI) guidelines GAP.4.1.0 and GAP.4.1.3 FM Global 6-4 Section 1.0
Main Gas Train with Dual Shut-off
Integrated Boiler Control, NURO Series
Operating Thermostat, 42°-195°F (5.6°-91°C)
High Limit Thermostat, Manual Reset, 100°-197°F (38°-92°C)
High Exhaust Back Pressure Switch
LWCO, Probe Type
Combustion Air Proving Switch, Differential Pressure Type
Combustion Blower, Variable Speed, 1625 Watt

A.S.M.E. SECTION IV DESIGN DATA

	SL-1500	SL-2000	SL-2500	SL-3000
Max Pressure	160 PSIG			
Max Allowable Temperature	210°F			
Max Setpoint	185°F			
Heated Surface Area	181.5 ft ²	181.5 ft ²	249.55 ft ²	249.55 ft ²
Flow Rate @ 20°FΔT	144 GPM	192 GPM	240 GPM	288 GPM
Min Flow Rate @ All Firing Rates	20 GPM	20 GPM	25 GPM	25 GPM

MODEL SELECTION

	☐ SL-1500	☐ SL-2000	☐ SL-2500	☐ SL-3000
Fuel Options	☐ NG			
Min Inlet Gas Pressure	3.5" w.c.			
Max Inlet Gas Pressure	14" w.c.			
Max Input (BTU/hr)	1,500,000	2,000,000	2,500,000	3,000,000
Max Output (BTU/hr)	1,440,000	1,920,000	2,400,000	2,880,000
Boiler HP	44.8	59.7	74.7	89.6
Min Input (BTU/hr)	150,000	200,000	250,000	300,000
Min Output (BTU/hr)	144,000	192,000	240,000	288,000
Turndown Ratio	10:1			
Operating Weight	3000 lbs.	3000 lbs.	3470 lbs.	3470 lbs.
Shipping Weight	2445 lbs.	2445 lbs.	2650 lbs.	2650 lbs.
Boiler Water Content	117 gal	117 gal	149 gal	149 gal
Shipping Dimensions	77.3"x35"x80" (LxWxH)		80"x35"x80" (LxWxH)	
Power Supply	208/240V, 1ph, 60Hz		☐ 208-240V 3ph 60 Hz ☐ 440-480V 3ph 60 Hz	
Operating Current	≤ 17 Amps	≤ 17 Amps	≤ 20 / 10 Amps	≤ 20 / 10 Amps
Recommended Minimum Circuit Capacity	20 Amps	20 Amps	30 / 15 Amps	30 / 15 Amps

PRESSURE RELIEF VALVE/PRESSURE-TEMPERATURE GAUGE

Shipped Loose for Field Installation

☐	30 PSIG 1-1/2"x 2"	15-160 psi/0-250°F
☐	60 PSIG 1-1/4"x 1-1/4"	15-160 psi/0-250°F
☐	75 PSIG 1-1/4"x 1-1/4"	15-160 psi/0-250°F
☐	80 PSIG 1-1/4"x 1-1/4"	15-160 psi/0-250°F
☐	100 PSIG 1"x 1-1/4"	15-160 psi/0-250°F
☐	125 PSIG 1"x 1"	15-160 psi/0-250°F
☐	150 PSIG 1"x 1"	15-160 psi/0-250°F

RECOMMENDED CLEARANCE FOR SERVICE ACCESS

Front - 30"	Rear - 18"	Top - 24"	Left Side - 12"	Right Side - 0"
-------------	------------	-----------	-----------------	-----------------

Notes:

-Patterson-Kelley reserves the right to make changes at any time without notification